
IT5034

Inductive sensor

ITB31,5BBPKG/AS

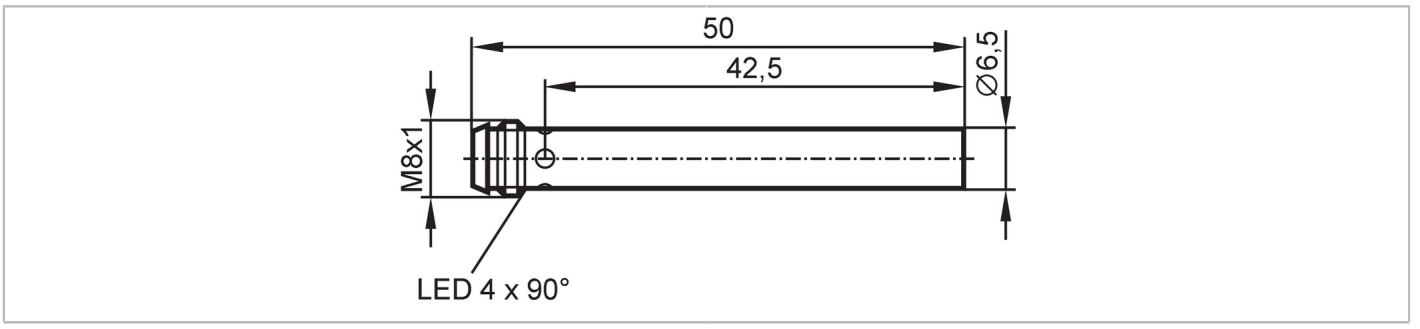

Product characteristics		
Electrical design		PNP
Output function		normally open
Sensing range	[mm]	1.5
Housing		cylindrical
Dimensions	[mm]	Ø 6.5 / L = 50
Application		
Application		Industrial applications / factory automation; For use where space is restricted
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 10
Protection class		III
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Short-time current rating of switching output	[mA]	100
Switching frequency DC	[Hz]	1700
Short-circuit protection		yes
Overload protection		yes
Detection zone		
Sensing range	[mm]	1.5
Real sensing range Sr	[mm]	1.5 ± 10 %
Operating distance	[mm]	0...1.22
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.4 / copper: 0.2
Hysteresis	[% of Sr]	1...20
Switch point drift	[% of Sr]	-10...10

IT5034

Inductive sensor

ITB31,5BBPKG/AS


Operating conditions			
Ambient temperature	[°C]	0...60	
Protection		IP 65; (with ifm socket duly screwed on: IP 67)	
Tests / approvals			
EMC		EN 61000-4-2 ESD	4 kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-5 Surge	0,5 kV line to line, Ri: 2 Ohm
		EN 61000-4-6 HF conducted	10 V
		EN 55011	class B
MTTF	[years]	2359	
Embedded software included		no	
UL approval		Ta	0...60 °C
		Enclosure type	Type 1
		voltage supply	Limited Voltage/Current
		UL approval no.	A017
		File number UL	E174191
Mechanical data			
Weight	[g]	16.8	
Housing		cylindrical	
Mounting		flush mountable	
Dimensions	[mm]	Ø 6.5 / L = 50	
Materials		housing: brass special coating; sensing face: PBT orange; LED window: PPSU	
Displays / operating elements			
Display		switching status	4 x 90° LED, yellow
Accessories			
Items supplied		Mounting clamps: 1	
Remarks			
Pack quantity		1 pcs.	

Electrical connection - plug

Connector: 1 x M8; coding: A; Contacts: 3



Connection

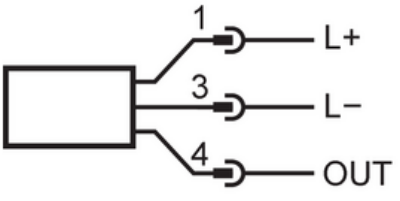

1	L+	
3	L-	
4	OUT	DO (NO)

DO: digital output; NO: normally open